


# Low Voltage Pin Insulator

These insulators are fitted on low voltage overhead lines (1.1 KV) for fixing of conductor to poles and in the distribution system of the town with leakage path 150 mm up to 280 mm with bending load up to 18 KN depend on the spindle the client is going to fix it with.


Product No.		026-00	027-01	055-00		
Creepage distance		mm	280	180	150	
Bending falling load		KN	10	8	12/18	
Withstand Voltage	Power frequency	Dry	KV	28	25	20
		Wet	KV	18	14	10
Lightning Impulse voltage		KV	75	55	40	
Power frequency puncture voltage		KV	40	40		
Net Weight (Approx.)		kg	1	0.5	0.7	

\* Due to continuous product improvements, some specifications could be changed without notice


\* Other designs are available



**027-00**

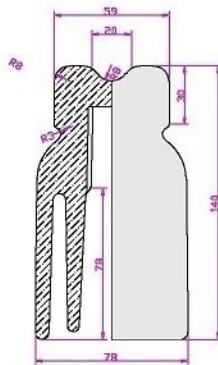

**026-00**

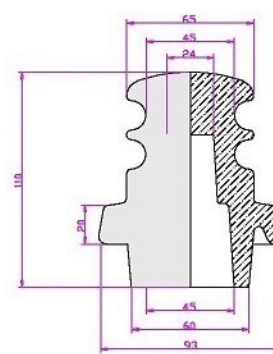

**055-00**